




Adhesive Mounts

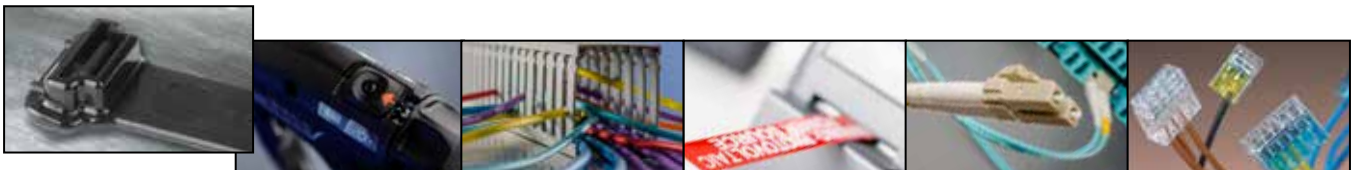

Bundling & Securing

Adhesive Mounts

Wide Strap Cable Tie Mounting Base/Very High Bond

MB-Series Self-Adhesive Mounting Bases


HellermannTyton's Wide Strap Adhesive Mount pairs with our exclusive line of Wide Strap Cable Ties and is ideal for extreme-duty applications. The mount features 3M™ VHB™ (Very High Bond) adhesive, which actually builds strength over time and holds securely to difficult materials such as aluminum, steel, plastics and painted and powder-coated surfaces.

Features and Benefits

- Wide slot extends the versatility of our Wide Strap Cable Ties.
- Extremely durable adhesive achieves high pull-off force and is unaffected by vibration.
- Mount made of proprietary, impact-modified PA66 material for extraordinary durability, and is heat stabilized and UV resistant for extended life outdoors.
- Peel and stick for quick, convenient use in extreme-duty applications.



| | |
|-----------------------|---------------------------------------------------------------------------------|
| MATERIAL | Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) |
| Operating Temperature | -40°F to +176°F (-40°C to +80°C) |
| Flammability | UL 94 V2 (excluding adhesive) |

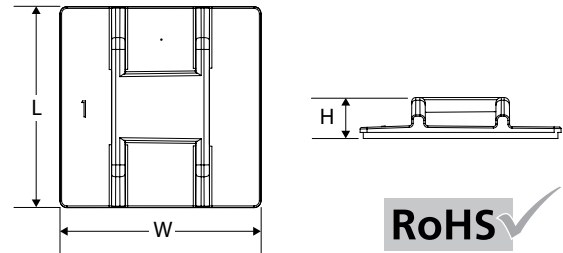

| PART NO. | Article No. | Type | Cable Tie Width Max. | | Adhesive | Length (L) | | Width (W) | | Height (H) | | Color | Pkg Qty |
|------------------------------------------------------------------------------------------------|-------------|----------|----------------------|--------|--------------|------------|--------|-----------|--------|------------|-------|-------|---------|
| | | | in. | (mm) | | in. | (mm) | in. | (mm) | in. | (mm) | | (pk) |
| For use with 120 pound wide-strap cable ties to provide stability when securing bundles | | | | | | | | | | | | | |
| 151-01857 | 151-01857 | WSMB5AHB | 0.5 | (12.7) | Acrylic foam | 1.49 | (37.7) | 1.49 | (37.7) | 0.30 | (7.7) | Black | 100 |

Use Type for ordering and specification purposes.

Instructions for use

1. Mounting surface must be thoroughly cleaned prior to applying adhesive pad. Use a 50/50 mix of isopropanol and water for best results, as commercial cleaners may leave residue.



2. Allow surface to completely dry before proceeding to next step.



3. Taking care not to touch adhesive, peel off protective backing.


Cable Tie Mounting Base/Very High Bond

MB-Series Self-Adhesive Screwable Mounting Bases


HellermannTyton offers adhesive mounts in a variety of sizes to match your cable tie size and extreme-duty application needs. The mount features 3M™ VHB™ (Very High Bond) adhesive, which actually builds strength over time and holds securely to difficult materials such as aluminum, steel, plastics and painted and powder-coated surfaces.

Features and Benefits

- Extremely durable adhesive achieves high pull-off force and is unaffected by vibration.
- Multiple sizes accommodate a range of cable ties.
- 4-way opening allows cable ties to be installed parallel or perpendicular to wire bundles.
- Predrilled holes extend mounting options and security.
- Mount made of proprietary, impact-modified PA66 material for extraordinary durability, and is heat stabilized and UV resistant for extended life outdoors.
- Peel and stick for quick, convenient use in extreme-duty applications.

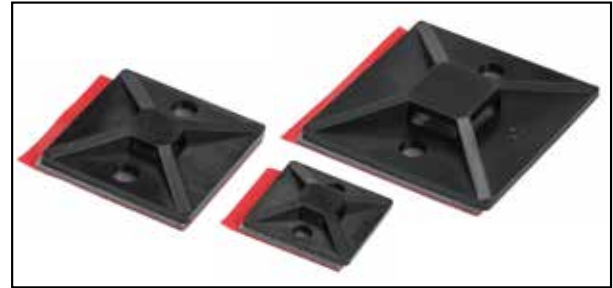


| | |
|-----------------------|---------------------------------------------------------------------------------|
| MATERIAL | Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) |
| Operating Temperature | -40°F to +176°F (-40°C to +80°C) |
| Flammability | UL 94 V2 (excluding adhesive) |




| PART NO. | Article No. | Type | Cable Tie Width Max. | | Adhesive | Length (L) | | Width (W) | | Height (H) | | Color | Pkg Qty |
|---------------------------------------------------------------------|-------------|------|----------------------|-------|--------------|------------|--------|-----------|--------|------------|-------|-------|---------|
| | | | in. | (mm) | | in. | (mm) | in. | (mm) | in. | (mm) | | (pk) |
| For use with 18 and 30 pound HellermannTyton cable ties | | | | | | | | | | | | | |
| 151-01629 | 151-01629 | MB3A | 0.14 | (3.6) | Acrylic foam | 0.75 | (19.0) | 0.75 | (19.0) | 0.19 | (4.8) | Black | 100 |
| 151-01630 | 151-01630 | MB3A | 0.14 | (3.6) | Acrylic foam | 0.75 | (19.0) | 0.75 | (19.0) | 0.19 | (4.8) | Black | 500 |
| For use with 18 through 50 pound HellermannTyton cable ties | | | | | | | | | | | | | |
| 151-01631 | 151-01631 | MB4A | 0.18 | (4.6) | Acrylic foam | 1.12 | (28.5) | 1.12 | (28.5) | 0.22 | (5.6) | Black | 100 |
| 151-01632 | 151-01632 | MB4A | 0.18 | (4.6) | Acrylic foam | 1.12 | (28.5) | 1.12 | (28.5) | 0.22 | (5.6) | Black | 500 |
| For use with 18 through 150 pound HellermannTyton cable ties | | | | | | | | | | | | | |
| 151-01633 | 151-01633 | MB5A | 0.35 | (8.9) | Acrylic foam | 1.49 | (37.7) | 1.49 | (37.7) | 0.28 | (7.1) | Black | 100 |
| 151-01634 | 151-01634 | MB5A | 0.35 | (8.9) | Acrylic foam | 1.49 | (37.7) | 1.49 | (37.7) | 0.28 | (7.1) | Black | 250 |


Use Type for ordering and specification purposes.



4. Press your thumb firmly against the mount for several seconds.



5. Wait several hours to allow the adhesive to fully bond with the surface.





**HellermannTyton North American
Corporate Headquarters**

7930 N. Faulkner Rd, PO Box 245017
Milwaukee, WI 53224-9517
Phone: (414) 355-1130, (800) 537-1512
Fax: (414) 355-7341, (800) 848-9866
email: corp@htamericas.com
www.hellermann.tyton.com

TS16949, ISO 9001, and ISO14001 certified

HellermannTyton Canada

Unit #4, 205 Industrial Parkway North
Aurora, Ontario L4G 4C4 Canada
Phone: (800) 661-2461
Fax: (800) 390-3904
email: sales@hellermanntyton.ca

HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A
Parque Industrial Tecnologico II
Santa María Tequepexpan
Tlaquepaque, Jalisco, Mexico 45601
Phone: 011-52-33-3-133-9880
Fax: 011-52-33-3-133-9861
email: info@htamericas.com.mx

ISO 9001 certified