



| REV | BY | DATE | ECN/ERO | DESCRIPTION |
|-----|---------|----------|---------|--------------------|
| 00 | Jinlong | 09/23/17 | - | Production release |

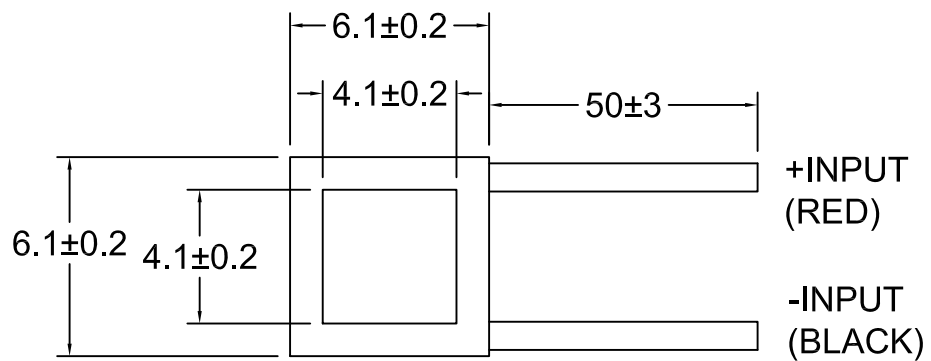


NOTES:

1. Use 5%Sb,95%Sn for solder.
2. Wire are UL1213, AWG28,7/36,PTFE.
3. Lapped both side, height is 4.60±0.20mm, flatness and parallel is 0.05mm.
4. ACR range @23°C: 1.233-1.370-1.507 ohm

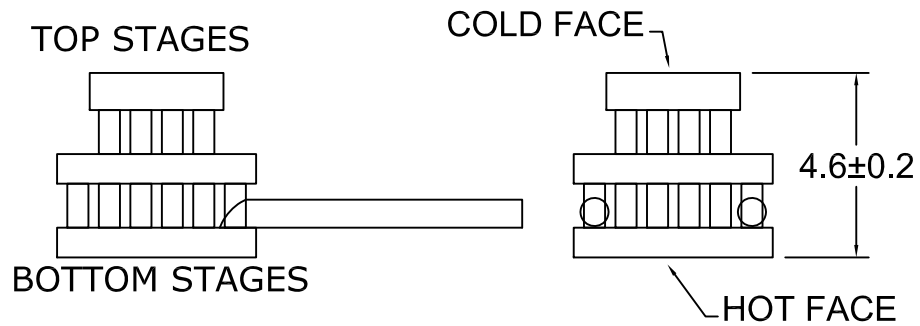

| REFERENCE ONLY! | |
|------------------------------|------|
| Nominal Specs (@25°C) | |
| I_{max} (A) | 1.4 |
| U_{max} (V) | 1.9 |
| Q_{max} (W) | 0.89 |
| ΔT_{max} (°C) | 85 |

NOTE:
ALL DIMENSIONS = mm

| | | | | | | | |
|---|--|--------------|--|------|-------------|------------------------------|-----------|
|  | | P/N | 387001821 | | DESCRIPTION | MS2,010,06,06,11,11,11,W2,ET | |
| | | TITLE | STANDARD 2-STAGE CASCADE CATALOG 232° SbSn CONSTRUCTION | | | | |
| 4707 Detroit Ave Cleveland, OH 44102 Ph.(216) 939-2300 Fax(216) 939-2310 | | NAME | Jinlong | DATE | 09/23/17 | DWG NO | 387001821 |
| SURFACE FINISH 3.2 √μm 125 √μin (UNLESS OTHERWISE SPECIFIED) BREAK ALL EDGES; 0.015 [0.40mm] x 45° | | DRAWN BY | Jinlong | DATE | 09/23/17 | REV | 00 |
| | | INITIATED BY | | | | | |
| | | APPROVAL | | | | | |