


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

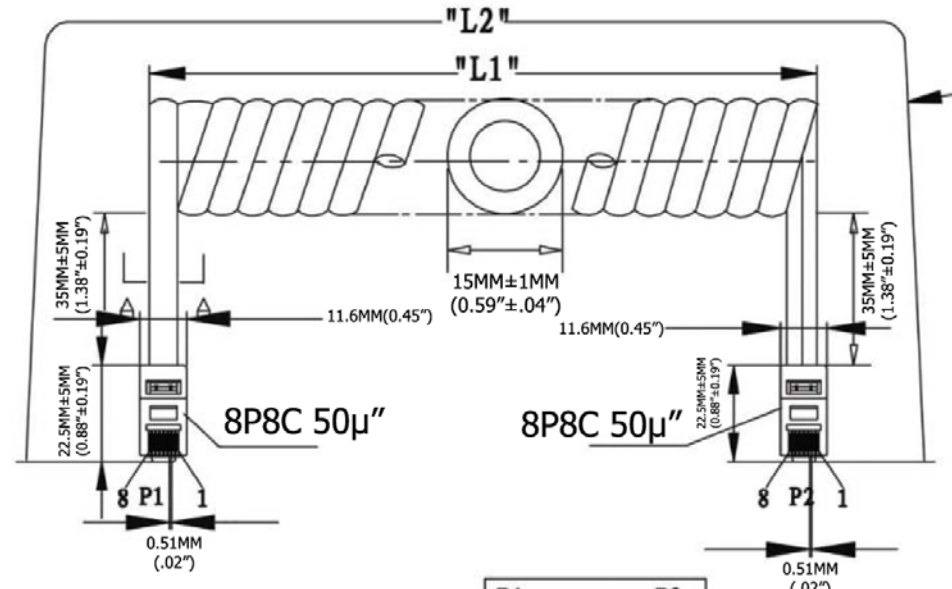


Extended length is with 500g of force

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [0.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

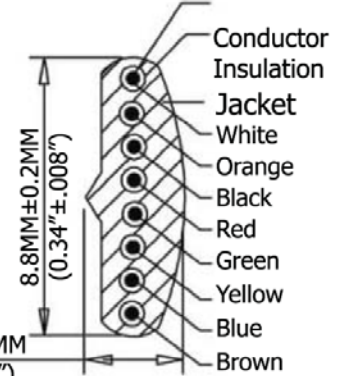

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	75.0 Inches
4,267.2MM-4,907.28MM	1,905.0MM

SEC: A-A



Scale	1:1					Name	Item No. AT-C-26-8/8/W-14/R	
TOLERANCE					Drawn	11.02.11		Title NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Reverse Plug, 50µ" of contact plating, WHITE
X.X	±0.40				Approved		Drawing No.	
X.XX	±0.25							Replace
X.XXX	±0.15						Sheet	
Angle	±3°							
		Modification	Date	Name				